

Service Kit 753-0641

Code: T-119

Date: August 22, 1995

Subject: Light Switch Kit for 800 Series Style "8" equipped with Onan engine.

INSTALLATION INSTRUCTIONS:

1. Lift open hood of tractor.
 2. Peel tape back on the wire harness until you expose approximately 4 inches of the wires. See figure 1.
 3. Cut blue wire in half.
 4. Strip wire back approximately 1/2" on both cut ends.
 5. Connect leads from service kit to the wire and secure with the wire nut supplied.
 6. Route light switch wire harness along left hand side grille support rod and secure with cable ties provided in this kit.
- NOTE:** Do not tighten cable ties until switch is installed into dash and wire harness is connected to switch.
7. Drill a 1/2" hole through the left hand side of dash panel above the throttle box. See figure 2.
 8. Remove nut from light switch and insert switch through hole from back of dash panel. Secure to dash panel with nut.
 9. Attach light switch wire harness to terminals of switch and tighten all cable ties. Start Engine, test switch.

Kit 753-0641 Consist of:

PART NO.	DESCRIPTION	QTY.
725-0733	Wire nut	2
726-0197	Cable Tie	1
725-0646	Light Switch	1
629-0353	Wire Leads	2

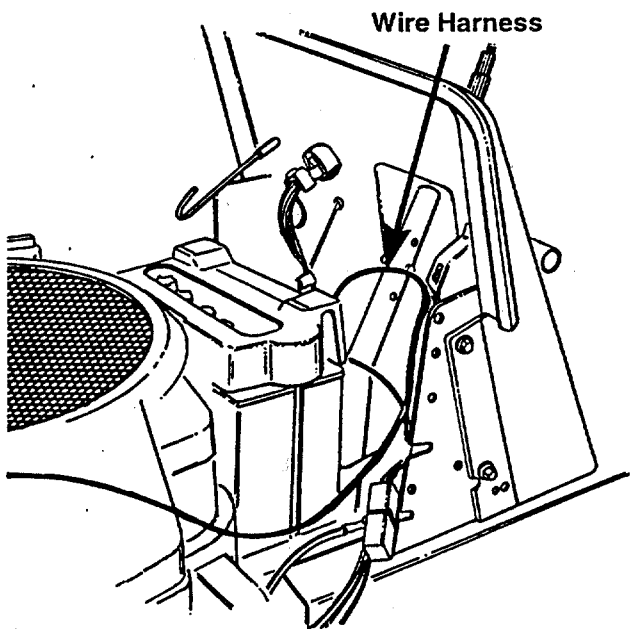


Figure 1

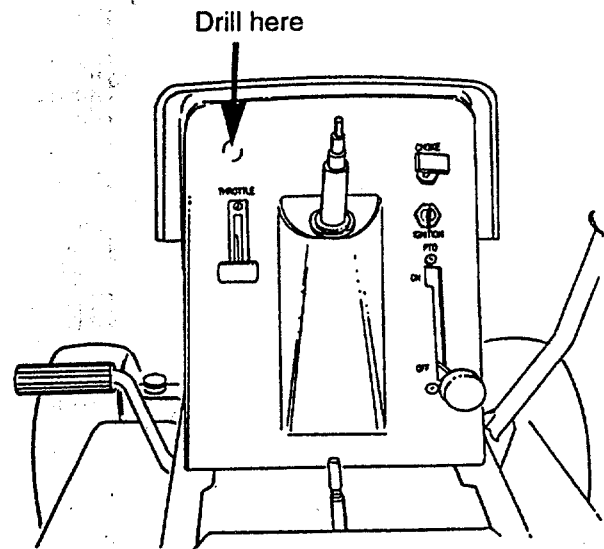


Figure 2.