

Service Kit 759-3960

CODE: R-457

Date: December 08, 2000

Subject: Adjustment Lift Links

Use this kit to change non adjustable lift links to adjustable lift links.

- With the snow thrower lowered to the ground, remove the left and right non adjustable lift links and retain the hardware. Assemble the new adjustable lift links with the parts supplied in the kit as follows. See Figure B. Thread one hex nut most of the way up on each eyebolt, then insert each eyebolt through the hole of each link as shown in Figure A. Secure each link with nylon lock nut. Place the new adjustable lift links along side the old non adjustable lift links. Adjust each eyebolt, equally, until the new lift link is the same length as the old lift link. Install the adjustable lift link onto each side of the snow thrower using the hardware previously removed. Loosen or tighten the nuts on the adjustable lift links as necessary to level the snow thrower side to side.
- If the drive shaft is contacting the muffler shield, loosen the top lock nuts and tighten the bottom hex nuts on each eyebolt to allow clearance between the drive shaft and the muffler shield.
- Test snow thrower for proper operation.

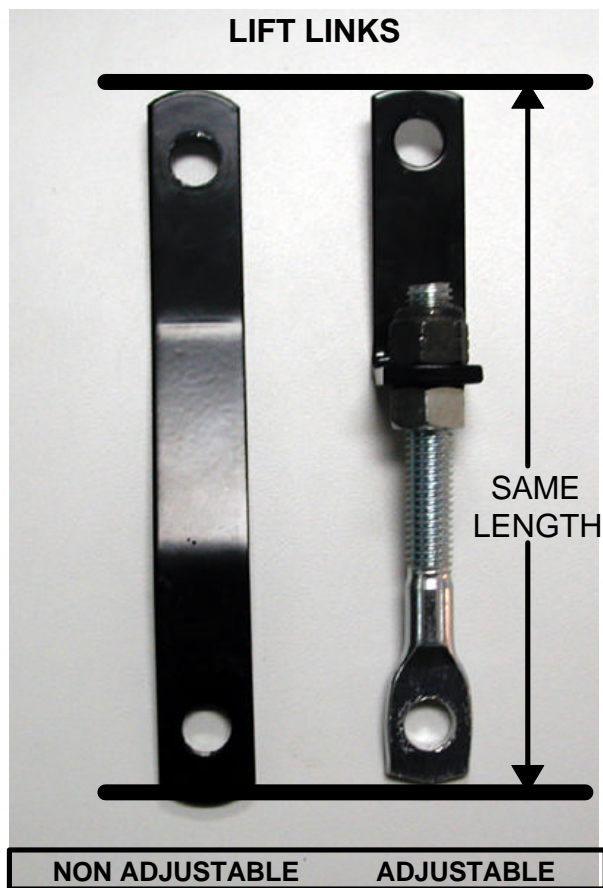


FIGURE A

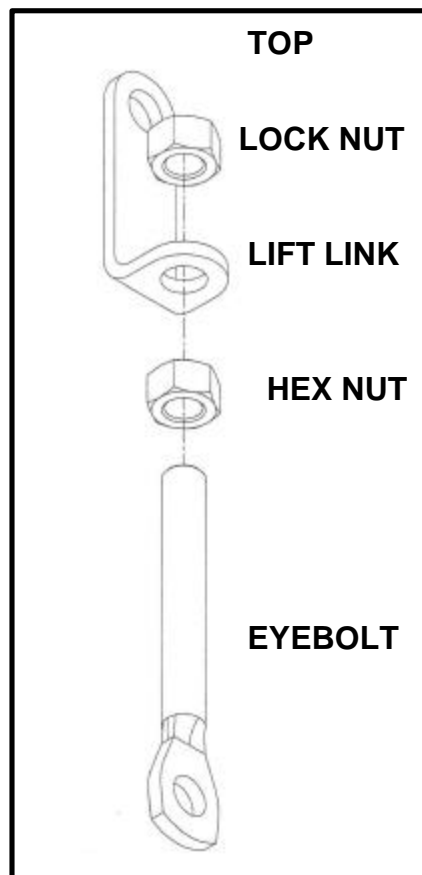


FIGURE B

Service Kit 759-3960 consists of:

Part Number	Description	Qty
712-3083	Nylon Lock Nut	2
703-3716	Lift Link	2
912-0206	Hex Nut	2
711-0817	Eye Bolt	2

Form No. 770-1861
(12/2000)